



# PIG-PLAS PIPEGUARD



1, 6, 15 & 30 in3  
FROM SOLID

60 in3 / 1.0 Liter  
And Above

TYPE SF-"O"

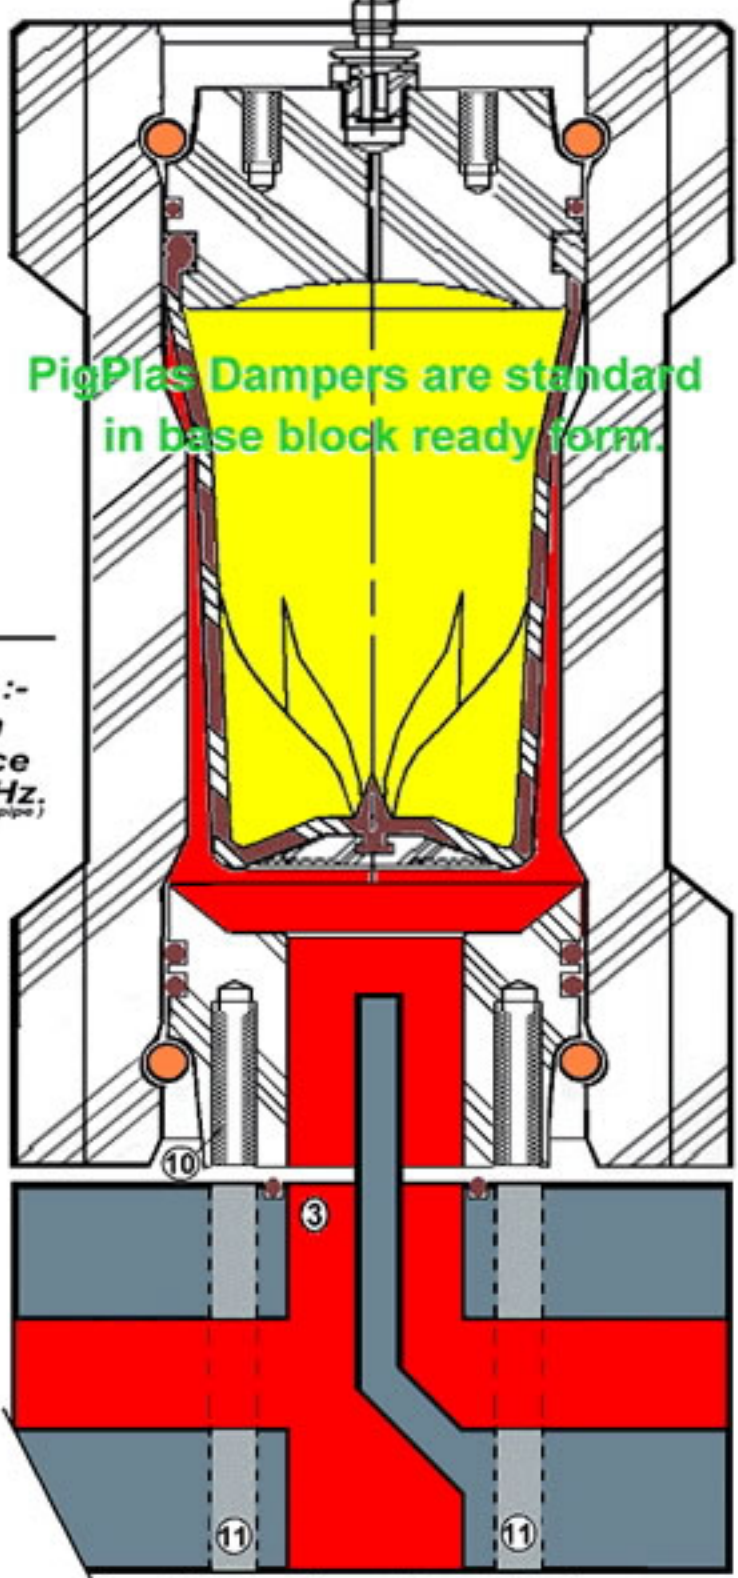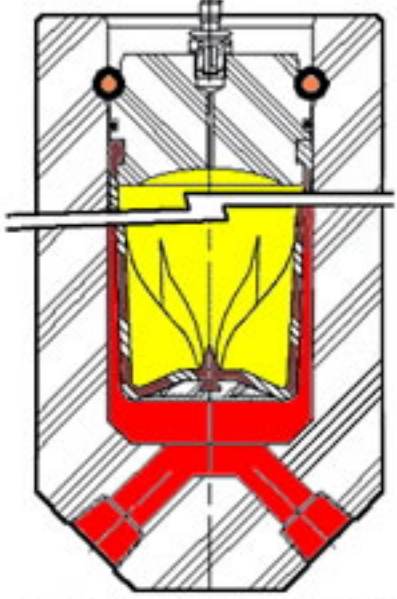


PigPlas Dampers are standard  
in base block ready form.

No "T" piece required.  
Type TW Threaded

- Single connection  
Not recommended for :-
- a. Pulsation Interception
  - b. Flushing before service
  - c. Frequencies above 7 Hz.  
(Shorter than 700 Ft of pipe)
  - d. Constant Temp.
  - e. Particulate service.




1 Connection  
Special Needs a "T"

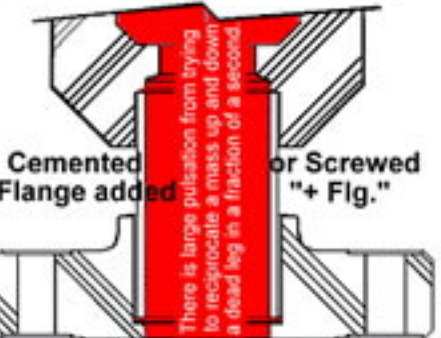

Needs A Flanged "T"

Connections Base Block  
Any combination & orientation of multiple connections.

- TW  
TWIN-PORTED FLUSH-IN-PLACE  
TRUE THRU-FLOW  
With Piping Base Block or direct threaded.  
COMPOSITE GENERAL VIEW

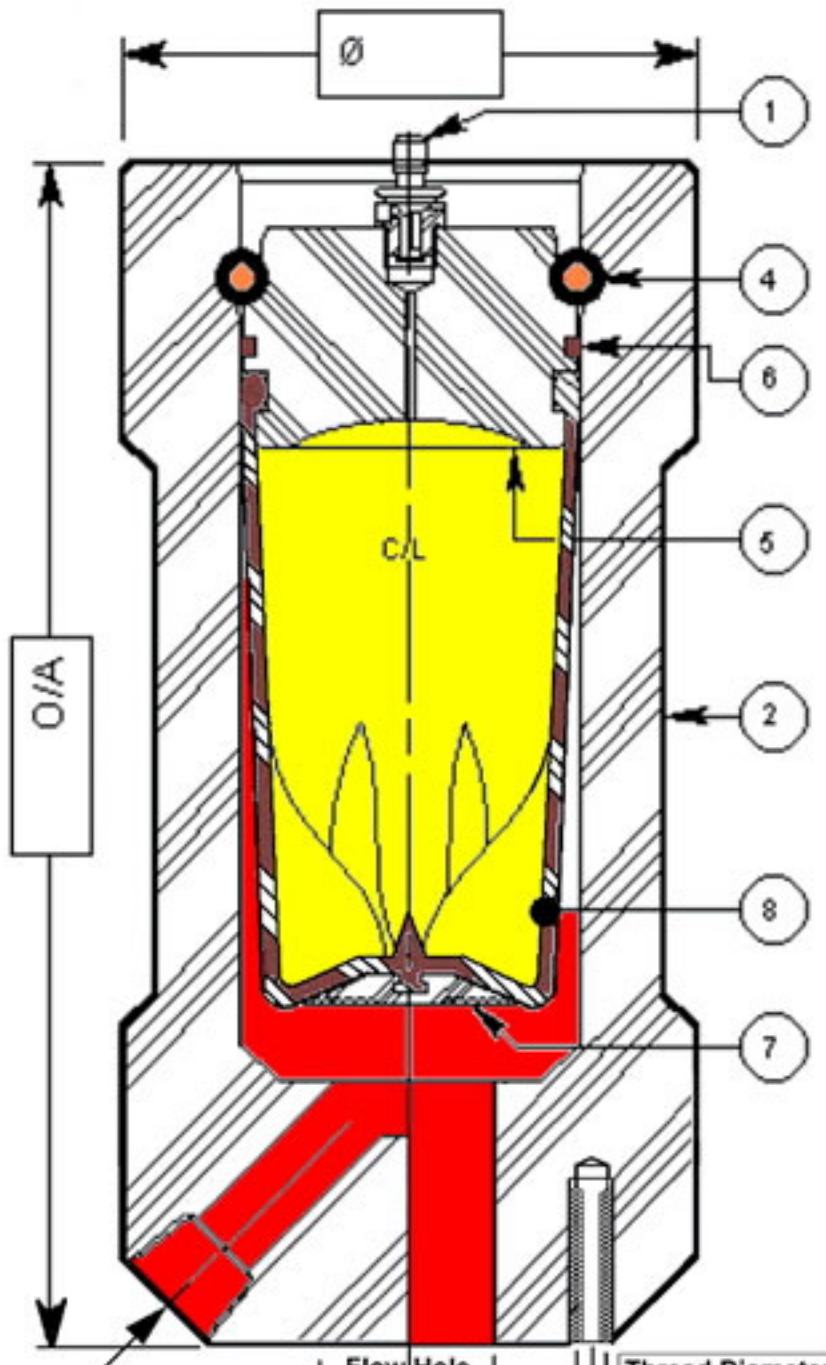

Connection/s Thread Number of  
Flow Hole Diameter  
Thread Diameter Number of On  
Pitch Circ. Rad.

Item	Part No.	Description	Material	I.D. #
1	9019C	Cushion Pre-Fill Viv.	304 St. St.	
2		Body	Polypropylene, PVC, Nylon,	
3		Face "O" Seal		
4		Segmental Lock Ring	Brass/Bronze	
5		Gas End Closure		
6		Diametral "O" Seals	0.25" Nom Dia, 60 IRH	
7		Anti-Extrusion Plate	Poly-Prop. or PVC	
8		Gas Bag	E.P.D.M., Hypalon, Viton, etc.	
9		Liquid End Closure		
10		Helicoil Thread Inserts		
11		Base Block Bolts 4		

CUSTOMER:  
CUSTOMER REF. :  
QUANTITY:  
W/O No. :  
WEIGHT (EST.):  
W:  
ISSUED BY:  
CHECKED BY:  
(DATE MONTH YEAR)  
ISSUE DATE:  
FILE REF: PigPlasV.bmp  
SCALE: NTS ALL DIMENSIONS ARE IN MM EXCEPT AS STATED.  
VIEW NO.  
**PIG-PLAS/**  
SHEET: 1 OF 1 REV. 0

**PULSEGUARD**  
Guard Against Pulsation Licensed M. Pecker 1963  
ISO 9001 - 95-LON-AQ-458 CE 0040 SS0210435  
www.pulseguard.co.uk www.pulseguard.com  
PO Box 47 Stockport Box 506 Hampstead  
SK5 7BB Ches. UK NC 28443-9110 USA  
-01-910-270-2737  
Fax. -01-910-270-2740

TITLE: **IN-LINE PIPEGUARD AND ACCUMULATOR**  
APPLICATION: **FERRIC CHLORIDE, SODIUM HYPOCHLORITE, DISSOLVED CHLORINES & HYDROCHLORIC ACID, etc.**