

POLISHED STAINLESS



PROCESS LIQUID

CUSHION PRE-FILL (N₂)

ELASTOMER

VIRGIN TEFLON

L	mm	ins
D	mm	ins

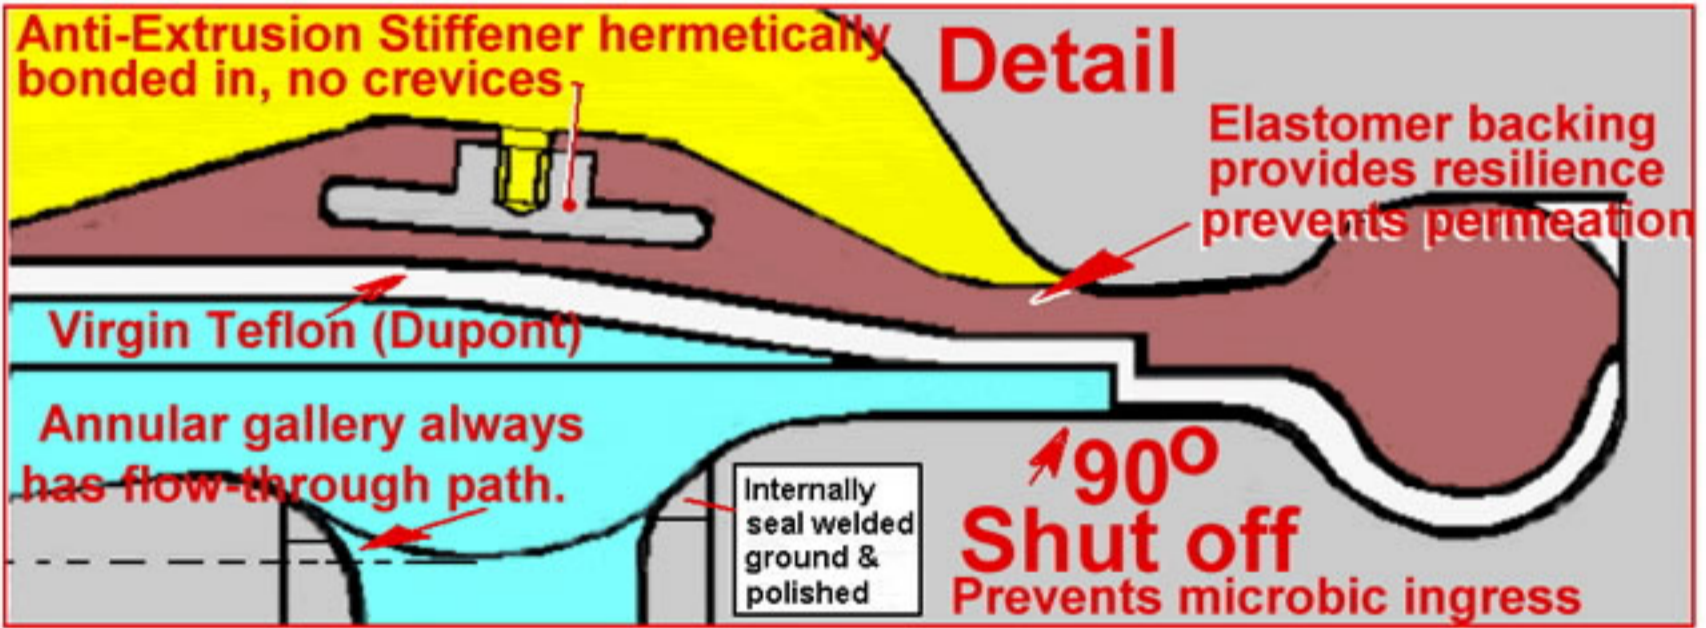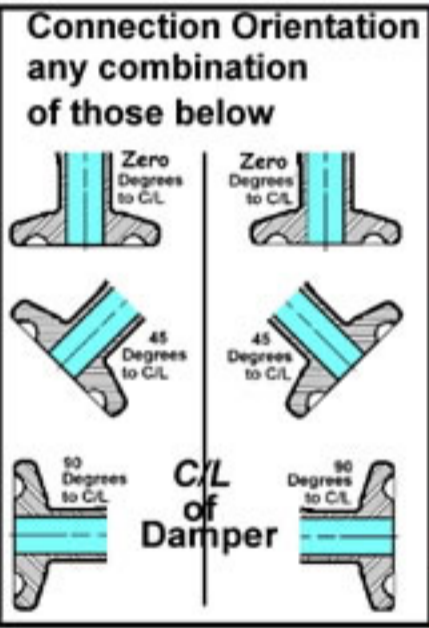

ITEM	PT. Nbr.	DESCRIPTION	MTL	HT / CAST Nbr.	CUSTOMER
1	9019c	PRE-FILLING VALVE	304SS		CUSTOMER REF.
2		CUSHION CHAMBER	316L		3rd. PARTY QA. EXTRA
3		LIQUID CHAMBER	316L		DOCUMENTATION LEVEL EXTRA
4		ALL-THREAD 3 places			WELDING W:
4a		MOUNTING NUTS/WASHERS			QUANTITY
4b		BOLTS 9 places			SHOP / JOB Nbr.
4c		NUTS & WASHERS			WEIGHT(Est.)
5					ISSUED BY M.P.
5a					ISSUED DATE Feb 2002
6					CHECKED BY D.B.
7			316L		FILE NAME TuG/HPLC/ss/
7a 7b		PIPE or TUBE	316L		SCALE Not To Scale.
7c 7d		PER CUSTOMER SPEC.	316L		Rev. #
8 g f	mm Diam. DT	90° Shut-off DIAPHRAGM with Encapsulated Virgin PTFE Faced.	PTFE & EPDM		DIMENSIONS ARE unless otherwise stated mm